

ELEVATOR CARD READER

MIWA Canada

Phone - 450 984 1113
800 724 5904

Fax - 450 984 2831
800 724 2910

info@miwacanada.com
www.miwacanada.com

ALV2 (ALVB) series/ Peripherals

Elevator Card Reader



Elevator card reader RDFL-B03H/RDFL-B03BLE

- Only the guests with a valid card keycard will have access to the elevators / floors.
- Reader is designed to be built into elevator panel.
- Up to 40 contacts relays available.
- Up to 4 card readers can be operable under one controller.
- ALVB Available with Mobile key option.

MIWA CanadaPhone - 450 984 1113
800 724 5904Fax - 450 984 2831
800 724 2910info@miwacanada.com
www.miwacanada.com

Specifications


Elevator card reader

External dimensions	W116mm × H120mm × D45mm
Weight	250g
Power supply	Supplied from controller
Environmental condition	-5°C~+50°C/20~90%RH (No condensation)

Elevator reader controller

External dimensions	W374mm × H314mm × D115mm
Weight	6kg (without back-up battery)
Power supply	AC100V ~ 240V ± 10%
Power consumption	75VA
Output	Normal open or close contact Max 40 relays
Duration of contact	1 ~ 59 sec. adjustable
Contact capacity	DC30V / 2A · AC250V / 2A
Environmental condition	Internal installation only 0°C ~ +50°C / 20 ~ 80%RH (No condensation)

Diagram

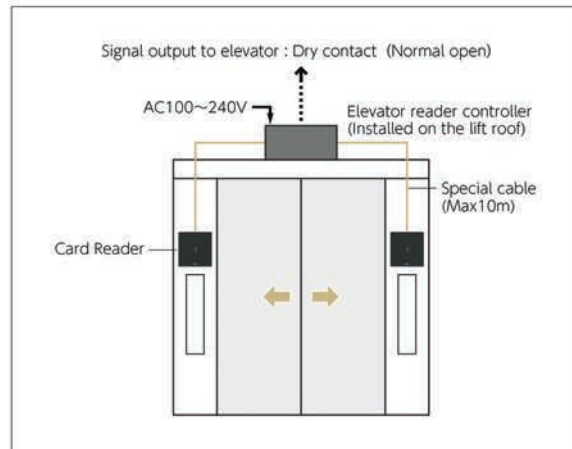

Detail Drawing

CMHL-401/402/403/404

RDFL-B03H/RDFL-B03BLE

